



8FT QUATTRO LINEAR

SECTION 1: SPECIFICATIONS

POWER	80W
VOLTAGE	100-277V
LED TYPE	SMD 2835
NUMBER OF LEDs	432
LUMINOUS FLUX	11200lm
MATERIAL	ALUMINUM
CCT	4000K (NW)
BEAM ANGLE	120°
IP RATING	IP66
FIXTURE LIFETIME	50,000HRS
OPERATION TEMPERATURE	-20° to +40°C
STORAGE TEMPERATURE	-40° to +85°C
DIMENSIONS	2400*71*84mm
WEIGHT	44.152KG

SECTION 2: CERTIFICATIONS



1	UL Listing: Underwriters Laboratory testing for dependable reliability and life span of fixture.
2	Rohs Certification: Restriction of Hazardous Substances- Ensuring no toxic chemicals or materials are used in the manufacture.
3	CE Certification: (Conformity European) to ensure that this product can be within the strictest standards of Europe.
4	Safety standards EN 60598-1: 2015; EN 60598-2-2: 2012;
5	EN 62031: 2008+A1: 2013+A2: 2015; EN 62493: 2015; EN 62471: 2008;
6	EMC Emission Compliance to EN55015: 2013,EN61000-3-2: 2014; EN61000-3-3: 2013;
7	EMC Immunity Compliance to EN61547: 2009;

SECTION 3: COMPARABLE OLDER LIGHT SOURCE

2 Feet Double Tube Vapor Proof Fixture	2FT Quattro linear
72 Watts Power	80 W Power
8000 Hour Lifespan	50,000 Hour Span
<IK4 Impact Resistance	Ik10 Impact Resistance
2 Points of Failure (Ballast + Bulb)	No Ballast
Carries no warranty	Always have warranty
Contains deadly mercury gas	RoHS certified for no toxic chemicals
Does not function well in cold environments	Operating -20-+40 Degrees Celsius

SECTION 4: INSTALLATION

B. Ceiling Mounted

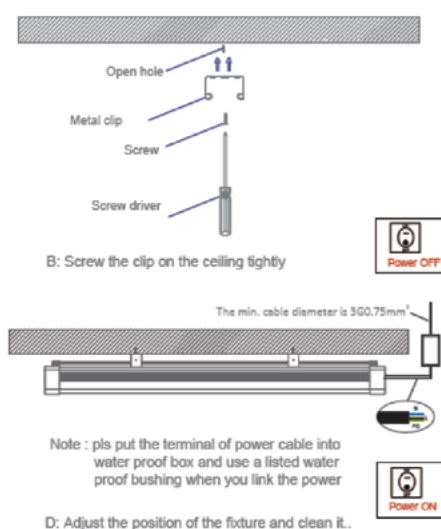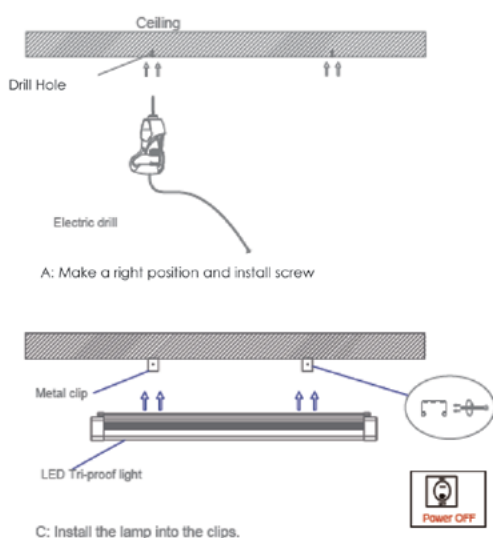

SECTION 5: WIRING DIAGRAM

