



STREET LIGHT 300W


VOL-SL-300-CW

SECTION 1: SPECIFICATIONS


Power Consumption	300W
Voltage	85-277V
CCT	6000-6500K
CRI	>70
Light output	175lm/W
Light Distribution	Type III
Fixture Life Span	> 50,000 Hrs
LED Type	LUMILEDS 3030
Driver	Meanwell
Operational Temperature Range	-40-+50°C
Storage Temperature Range	-40-+50°C
Ingress Protection	IP67
Material	Die-cast Aluminum
Dimensions	611x305x67mm

SECTION 2: INSTALLATION

Option 1

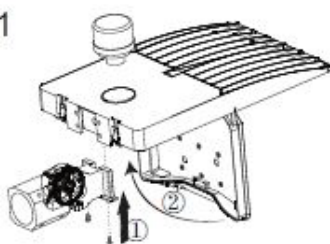

STEP 1. Slot slip fitter into buckle, fixed with screws
STEP 2. Close the driver box

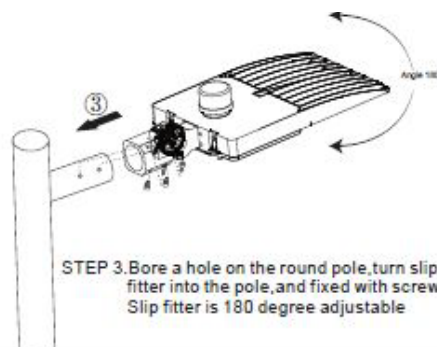

STEP 3. Bore a hole on the round pole, turn slip fitter into the pole, and fixed with screws. Slip fitter is 180 degree adjustable

CERTIFICATIONS

RoHS
Compliant

CE

UL

IP 67

- ✓ Optical light distribution, no glare, no light pollution, high uniformity.
- ✓ High power factor, energy saving and environmental protection.
- ✓ Weather resistant
- ✓ Elegant design